
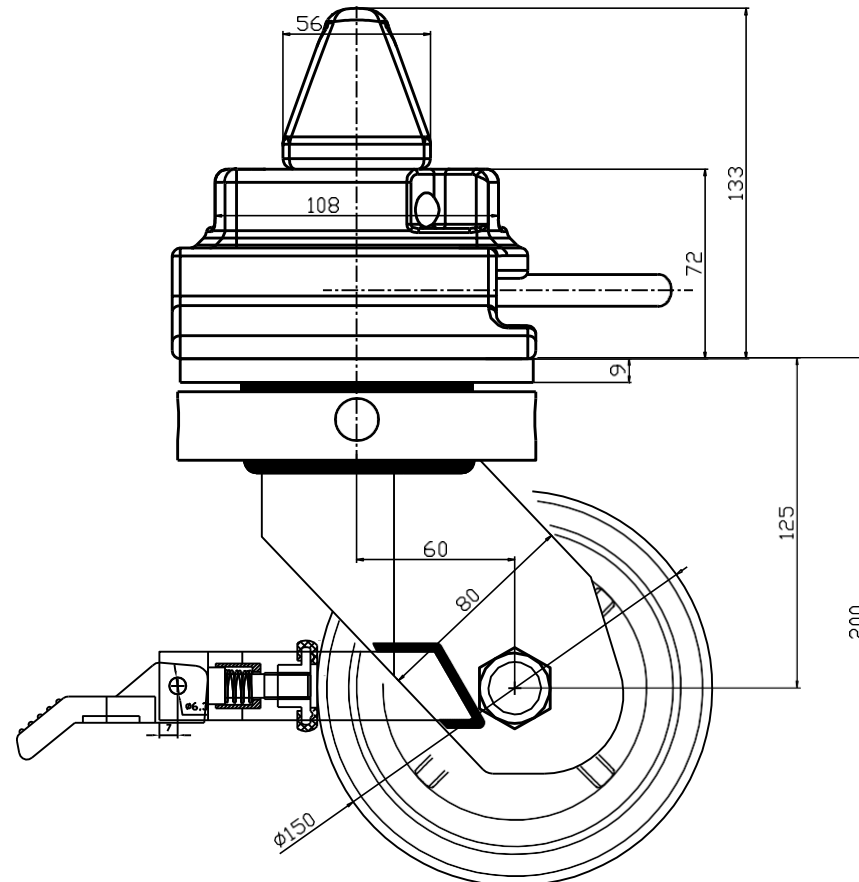


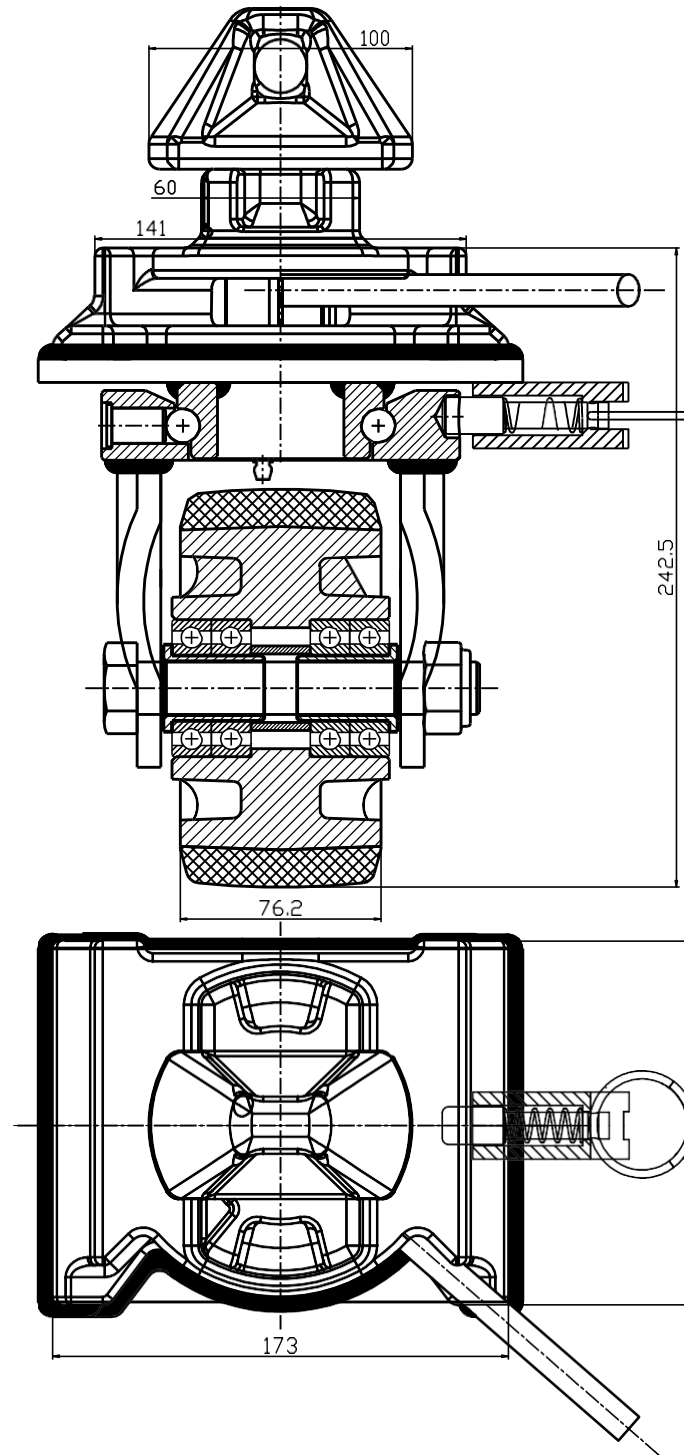

Technical specifications:

1. The surface of the bracket is electroplated with yellow zinc;
2. The outer part of each wheel is covered with orange high-load polyurethane with Shore A hardness of 95, the core of the wheel is cast iron, and the surface is sprayed with black paint;
3. The bracket and the wheel can rotate flexibly;
4. The static load capacity is 1,800KG per caster;
5. One set of 4 caster can handle a dynamic load capacity 5,400KG.
6. Maximum permitted speed: 4 km/h

Twistlock Dynamics Compact

Contact:

support@twistlockdynamics.com | <http://twistlockdynamics.com>

+1 (346) 214-1499

