


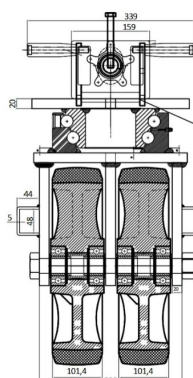


Xtreme

Heavy-duty container wheels · set of 4 · side-lock connection

Rev. 10/2026

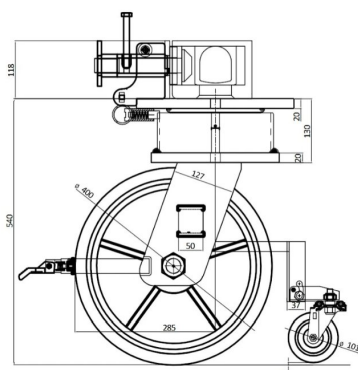

Technical specifications:

1. The surface of the bracket is electroplated with yellow zinc;
2. The outer part of each wheel is covered with orange high-load polyurethane with Shore A hardness of 95, the core of the wheel is cast iron, and the surface is sprayed with black paint;
3. The bracket and the wheel can rotate flexibly;
4. The load capacity is 10,000KG dynamic load capacity;
5. One set of 4 caster can handle a dynamic load capacity 30,000KG.

Twistlock Dynamics Xtreme

Contact:
support@twistlockdynamics.com | <http://twistlockdynamics.com>
+1 (346) 214-1499

Dynamic load capacity (per set of 4)

30,000 kg

Static load capacity (per set of 4)

40,000 kg

Technical specifications

Wheels per set	4 swivel casters with directional lock and brake
Wheel size	2 × Ø 400 × 101.4 mm (dual wheel)
Overall height	540 mm
Mounting plate	320 × 320 mm, hole pattern 254 × 254 mm
Tread	Polyurethane, 95 Shore A
Wheel core	Cast iron, black painted
Bracket finish	Yellow zinc electroplated
Max. permitted speed	4 km/h
Attachment	Side-lock
Included	4 casters, support wheel for positioning, handlebar
Availability	Made to order

Good to know

- For the heaviest loads: generator containers, loaded BESS containers and heavy equipment up to 30,000 kg in total.
- Loads above 30,000 kg need a custom solution. Contact us with your data sheet.

Always check that the total weight of container plus contents does not exceed the dynamic load capacity of the wheel set. Specifications may change without notice. Find the right set with the container wheel selector: twistlockdynamics.com/container-wheel-selector